


JOGN

A single knit machine designed for production of
basic three camtracks stitch structures,
plated jersey

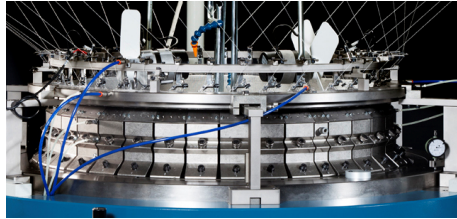

Traditional Orizio modular frame renovated in its functionality, robustness and aesthetics, with the new "Oritec" control panel which allows the fruition of new technologies and completes the machine's control with the following functions:

- diagnostic indication and visualisation of stops and alarms.
- built-in preparation for incorporated yarn/fabric measuring programme
- production data recorded and memorised for 30 days
- Usb connection for quick software update

Main features and obtainable fabrics:

1.2 feed per diametrical inch machine with 3 camtracks, provided with needles and cams to knit different basic stitches: jersey, visible 1:1, 2:1, 3:1 fleece, double fleece, piqué, double piqué, twilled and double twilled cloth, mock interlock, locknit, gouffrè 4/6 needles, vertical stripes, small checks and plated jersey.



JOGN

STANDARD EQUIPMENT

"Oritec" electronic control
Electronic drive system with Inverter
Storage-type positive feeding units
Micrometrical stitch adjustment at each feed
Centralised stitch control on all feeds
Wear-resistant, ceramic yarn carriers
Needles and sinkers automatic lubrication system
Cleaning system on needles, sinkers and yarn passages by combined compressed air and fans
Yarn measuring device
Modular side creels, double-tie, fully-tubed
Cylinder prepared to receive up to 3 camtracks

OPTIONAL ACCESSORIES

Elastomer Kit
Plated jersey kit
Cams and needles for extra camtracks
Dust/sludge extractor device from needles and sinkers zone
Circular creel, Antistatic creel, Closed creel with automatic yarn air threading device, creel with automatic yarn air threading device
Fabric scanner
Lapping device with or without fabric bin
High or super high frame for rolls up to 1,00 m diameters
Open width frame for fabrics without side creases

Diameter	Gauge	R.P.M. (max)	Peripheral speed mt./sec.	No. of feeders	Motor Power kw	Net weight Kg	Gross weight kg wooden case	Floor space m ²
30"	7 - 14	25	1,20	36	6,3	1800	2300	14
36"		22		42		2720	3260	17

Orizio reserve the right to modify at any time and without previous notice the machine characteristics mentioned in this leaflet
February 2015

